



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04Q 7/00</b>		A2	(11) International Publication Number: <b>WO 98/25420</b>
			(43) International Publication Date: 11 June 1998 (11.06.98)
(21) International Application Number: PCT/US97/21737		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 3 December 1997 (03.12.97)			
(30) Priority Data: 08/761,597 6 December 1996 (06.12.96) US			
(71) Applicant: ERICSSON INC. [US/US]; 7001 Development Drive, P.O. Box 13969, Research Triangle Park, NC 27709 (US).			
(72) Inventors: ALPEROVICH, Vladimir; 18149 Rain Dance Trail, Dallas, TX 75252 (US). MAUPIN, Alain; 1133 Lookout Drive, Richardson, TX 75080 (US).			
(74) Agents: MOORE, Stanley, R. et al.; Jenkins & Gilchrist, P.C., Suite 3200, 1445 Ross Avenue, Dallas, TX 75202 (US).			

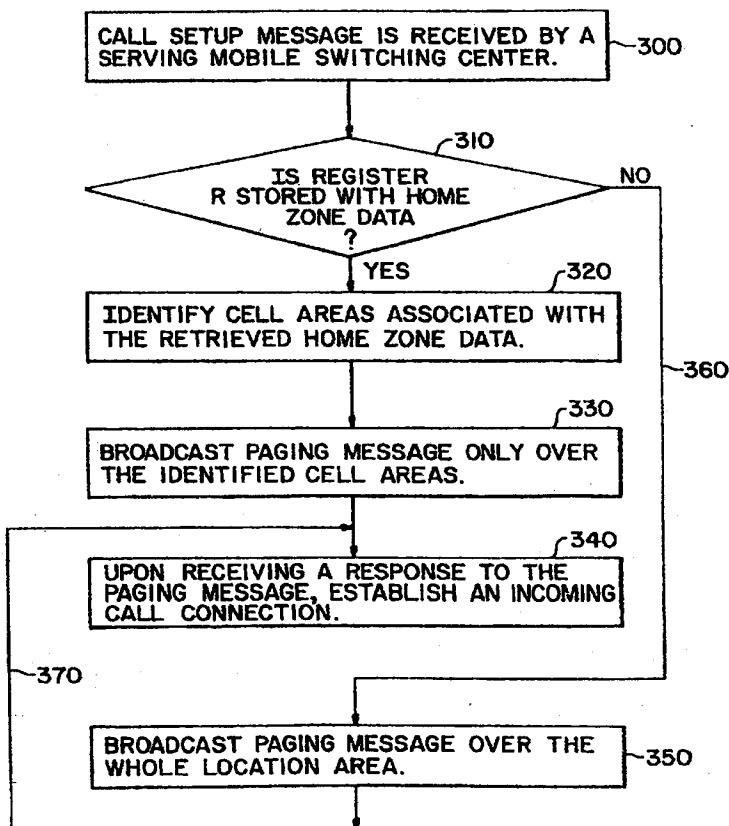
**Published**

*Without international search report and to be republished upon receipt of that report.*

(54) Title: PAGING A MOBILE STATION WITHIN A PUBLIC LAND MOBILE NETWORK (PLMN)

## (57) Abstract

A first location update is performed whenever a mobile station enters a particular location area. Thereafter, in the event that the mobile station enters a designated home zone within the location area, a second location update is again performed to inform the serving mobile switching center (MSC) that the mobile station is currently located within the designated home zone. All paging messages for subsequent incoming calls are then broadcasted only within the cell areas associated with the designated home zone.



**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

-1-

PAGING A MOBILE STATION WITHIN A PUBLIC  
LAND MOBILE NETWORK (PLMN)

## BACKGROUND OF THE INVENTION

5        Technical Field of the Invention

The present invention relates to a telecommunications network and, in particular, to the provision of a paging message broadcast towards a mobile station within a Public Land Mobile Network (PLMN).

10

Description of Related Art

With the introduction of the Global System for Mobile (GSM) communication and the Personal Communications System (PCS), the concepts of wireline telephone service and  
15        wireless telephone service have changed drastically. Instead of assigning a telephone number to a particular geographic location, GSM or PCS teaches the assignment of a telephone number to a particular subscriber. As a result, each subscriber is associated with a Subscriber  
20        Identity Module (SIM) card. Using an SIM card, a mobile subscriber is able to store necessary mobile subscriber information in a detachable memory unit and thereafter freely associate the module with any available mobile station. Such information includes a mobile subscriber's  
25        Mobile Station Integrated Service Digital Network (MSISDN) number, and other user specified information, such as preferred speed dialing lists or screening lists. By inserting a mobile subscriber's SIM card into a mobile station, the stored subscriber information in the inserted  
30        SIM card is available to the mobile subscriber's new terminal. As a result, the mobile subscriber is able to freely utilize any available mobile station while maintaining the same MSISDN number and subscriber feature data.

35        Furthermore, in order to enable the mobile subscriber to utilize the associated mobile station as a cordless

-2-

phone for charging purposes while traveling within a certain geographic location, the concept of a "home zone" has been introduced. If the mobile subscriber makes a call within his or her home zone, the mobile station functions as a conventional cordless phone and the mobile subscriber is not charged for the air time, or is charged at a significantly lower air time rate. Accordingly, within his or her home zone, the mobile subscriber can utilize his or her mobile station to originate outgoing calls without incurring expensive air time charges and without physically using a different telephone terminal, e.g., wireline terminal such as a cordless phone.

With a conventional cordless terminal, a radio frequency range between the serving base unit and the cordless terminal is rather limited. Consequently, a subscriber is not able to travel out of the immediate vicinity of the base unit and make outgoing calls. However, with a PCS or GSM based telecommunications network, even if the mobile subscriber is within the home zone, the telecommunications service is still being provided by the same mobile switching center (MSC) serving that particular geographic location. Therefore, within the conventional cordless system, it was the physical limitation that imposed the geographic boundaries of the service area. In contrast, within the GSM or PCS network, it is the logical limitation that imposes the geographic boundaries of the mobile subscriber's home zone. Accordingly, the home zone associated with a particular mobile subscriber can be much larger than what was previously available with the conventional cordless system. Such a home zone may include only a few blocks from the subscriber's home or business, or a radius of half mile, for example, covering a certain location.

Home zones are designated because, statistically, mobile subscribers tend to spend a great amount of time in one fixed location. Accordingly, a favorable billing rate is provided as long as a particular mobile subscriber

-3-

is located within his or her designated home zone. Normally, such home zones designated by mobile subscribers are much smaller than the location areas (LA) associated with those home zones. As an illustration, a typical  
5 location area may include hundreds or even thousands of cell areas (CA), whereas a home zone might typically cover only a few cell areas within a location area.

Whenever an incoming call is received towards the mobile station located within the designated home zone,  
10 the serving MSC needs to page the called mobile station. Because the serving MSC has no means of determining which cell area is currently serving the called party mobile station until the mobile station responds to the page, the serving MSC must broadcast paging messages throughout the  
15 whole location area. Utilization of paging channels (PCH) associated with hundreds or even thousands of involved cell areas (CA) to page a single mobile station located within a much smaller home zone is a rather inefficient and wasteful use of system resources.

20 Accordingly, there is a need for a mechanism to page a mobile station more efficiently and effectively when the mobile station is currently traveling within its designated home zone.

## 25 SUMMARY OF THE INVENTION

One or more cell areas within a particular location area is designated as a home zone for a particular mobile subscriber within a mobile telecommunications network. Whenever the mobile station enters the location area, a  
30 first location update is performed to inform the serving mobile switching center (MSC) that the mobile station is within the specified location area. Thereafter, in case the mobile station enters the home zone within that location area, yet another location update is performed  
35 to further inform the serving MSC that the mobile station is now within the home zone. Subsequently, all paging messages for incoming calls intended for that mobile

-4-

stations are broadcast only within those cell areas associated with the designated home zone.

#### BRIEF DESCRIPTION OF THE DRAWINGS

5           A more complete understanding of the method and apparatus of the present invention may be had by reference to the following detailed description when taken in conjunction with the accompanying drawings wherein:

10           FIGURE 1 is a block diagram of a telecommunications network illustrating multiple mobile switching centers (MSCs) within a Public Land Mobile Network (PLMN);

            FIGURE 2 is a block diagram illustrating a single MSC area further comprising multiple location areas (LAs);

15           FIGURE 3 is a block diagram illustrating a single location area (LA) further comprising multiple cell areas (CAs);

            FIGURE 4 is a block diagram of a telecommunications network including a Public Land Mobile Network (PLMN) for routing an incoming call to a mobile station;

20           FIGURE 5 is a block diagram of a PLMN illustrating a home zone for a particular mobile station within a location area;

25           FIGURE 6 is a block diagram of a PLMN illustrating a mobile station performing a location update upon entering the designated home zone; and

30           FIGURE 7 is a flowchart describing the steps performed by a serving mobile network to route an incoming call towards a mobile station located within its designated home zone.

#### DETAILED DESCRIPTION OF THE DRAWINGS

35           FIG. 1 is a block diagram of a telecommunications network illustrating multiple mobile switching center (MSC) areas 10 within a Public Land Mobile Network (PLMN) 20. A PLMN network 20 is a complex configuration comprising multiple MSCs 30, VLRs 40, HLRs (not shown in FIG. 1), GMSC 50, etc. In order to properly switch or

-5-

route a call to a mobile station located within a particular PLMN 20, the correct entities and devices need to be invoked and involved in a call process. The individual PLMN 20 may contain parts of one or more single Local Access Transport Areas (LATA). There are over three hundred LATAs presently defined throughout the United States. As shown in FIG. 1, within each LATA, there are multiple MSC/VLR areas 10 each being served by an individual MSC/VLR (usually, an MSC 30 is co-located with a corresponding VLR 40, and hereinafter referenced collectively as an MSC/VLR).

Reference is now made to FIG. 2 illustrating multiple location areas 60a-60f within a particular MSC area 10. A location area (LA) is a part of the MSC service area in which a mobile station may move freely without updating location information to the MSC/VLR 30/40 serving that location area. Therefore, a location area (LA) is the area where a paging message is broadcast to find the called mobile station for an incoming call. A location area identity (LAI) which identifies each location area 60 is used by the mobile network to search for a mobile station in idle state.

Further referring to FIG. 3, each location area 60 within a particular MSC coverage area 10 is further divided into multiple cell areas (CAs) 70a-70f. Each cell is served by a separate base transceiver station (BTS, not shown in FIG. 3). However, as described above, all cells within a single location area are served by the same MSC 30 and VLR 40. As a result, different cell areas (CAs) 70 within a single location area (LA) 60 are distinguished by the MSC/VLR and the serving base station system (BSS) using a Cell Identity (CI) assigned to each cell. Different cell areas (CAs) 70 using the same Broadcast Control Channel (BCCH) frequency are then distinguished by the mobile station using a Base Station Identity Code (BSIC).

-6-

Reference is now made to FIG. 4 illustrating the routing of an incoming call towards a mobile station 100 within a telecommunications network. Whenever the mobile station 100 travels into a particular mobile switching center (MSC) coverage area, a registration is made, and  
5 a visitor location register (VLR) 40 associated with the serving MSC 30 communicates with a home location register (HLR) 90 associated with the mobile station 100. Such communication informs the HLR 90 of the mobile station's  
10 current location. It further enables the VLR 40 to copy relevant subscriber information associated with that particular mobile subscriber from the HLR into its associated database. The serving MSC/VLR 30/40 is now able to provide mobile service, such as call connections,  
15 to the newly registering mobile station 100.

Whenever a telecommunications terminal, such as a wireline terminal 120 connected to a Public Switched Telephone Network (PSTN) 110, originates a call connection towards the mobile station 100, a call setup message is  
20 generated and routed to a gateway mobile switching center (GMSC) 50 associated with the mobile station 100. The GMSC 50, in turn, performs an HLR interrogation to determine the location of the mobile station 100 by transmitting a signal 130 to the HLR 90 requesting routing  
25 information. The HLR 90, which stores subscriber information and keeps track of the current location of the mobile station 100, then transmits a signal 140 requesting a roaming number to the MSC/VLR 30/40 currently serving the mobile station 100. In response, the serving MSC/VLR  
30 30/40 identifies the called party mobile station 100 and returns the roaming number to the HLR 90 via another signal 150. The HLR 90, in turn, forwards the received roaming number representing the network address of the serving MSC 30 back to the requesting GMSC 50 with yet  
35 another signal 160. Utilizing the received roaming number, the GMSC 50 then reroutes the received call setup signal to the specified MSC 30. After querying the



-7-

associated VLR 40 to determine the current location area (LA) covering the mobile station 100, the serving MSC 30 then pages the mobile station 100 within the determined location area. Upon receiving a response back from the paged mobile station, the serving MSC 30 identifies the particular cell currently serving the called party mobile station and establishes a call connection over an appropriate traffic channel 170 associated with that determined cell area.

Referring back to FIG. 3, although only six cell areas 170a-170f are shown within a single location area 160 for exemplary purposes, a typical location area usually comprises hundreds of individual cell areas. Since the VLR 30 only maintains data indicating which location area is currently serving the called party mobile station, each time an incoming call is received towards a particular mobile station, each and every one of the associated cell areas within a relevant location area needs to be paged. Since a mobile station is physically located within only one cell area in a given time, broadcasting paging messages over hundreds of cell areas is a rather inefficient and wasteful management of valuable channel resources.

On the other hand, in order to transmit a paging message only towards a particular cell area currently covering the called party mobile station, the serving MSC/VLR 30/40 needs to be updated and maintained with data identifying the current cell area. Consequently, the mobile station 20 needs to perform a location update or communicate with the associated MSC/VLR 40/30 each time the mobile station 20 travels out of a first cell area and into a second cell area. Since each cell area covers a relatively small geographic area, the frequency of such exits and entries could, as a result, cause an unmanageable and undesirable amount of resulting signaling overhead to be imposed on the associated telecommunications node.

-8-

With the introduction of the Global System for Mobile (GSM) communication and the Personal Communications System (PCS), the concept of a "home zone" (HZ) has been introduced. Statistically, it has been shown that a  
5 typical mobile subscriber tends to spend a large amount of time within a fixed location, such as his or her residence or business. In order to enable the mobile subscriber to utilize his or her mobile stations as a  
10 conventional cordless phone without switching to a different terminal or telecommunications network, such a frequently used fixed location associated with that particular mobile subscriber is designated as a "home zone". Accordingly, as long as the mobile subscriber is located within the designated home zone, the PLMN serving  
15 the mobile station does not charge for the air time, or is charged at a significantly lower air time rate. As a result, the mobile station is still being served by the same PLMN but charged at a reduced rate.

Reference is now made to FIG. 5 illustrating a home zone within a particular location area. A selected  
20 geographic area is designated by a mobile subscriber as his or her "home zone". Accordingly, one or more cell areas, such as 70a-70b, are associated with the mobile subscriber as his or her home zone cell areas. Data  
25 identifying the home zone cell areas are then stored at the associated mobile station or at a Subscriber Identity Module (SIM) card associated with the mobile subscriber. Whenever the mobile subscriber travels into a particular cell area 70, the associated mobile station 100 receives  
30 a broadcast message transmitted over one of the broadcast channels identifying the current cell area. By comparing the received cell area data with its internally stored home zone data, the mobile station is able to ascertain whether the mobile subscriber is currently within his or  
35 her home zone. An indication informing the mobile subscriber's entry into the designated home zone is then displayed on the associated display unit. Thereafter, a

-9-

call setup signal transmitted from the mobile station to the serving MSC includes an indication that the call is being originated within the designated home zone. As a result, the reduced rate is accordingly changed to the corresponding subscription for this particular call connection.

As described above, performing location update with a serving MSC/VLR each time a mobile station travels in and out of a particular cell area is impractical. On the other hand, paging a mobile station throughout the whole location area in a conventional manner is also rather inefficient and wasteful. However, statistically, it has been shown that the associated mobile subscriber spends a substantial amount of time within his or her designated home zone. By performing a location update whenever a particular mobile station enters and exists a designated home zone instead of each and every cell area, the number and frequency of such location updates becomes manageable. By informing the serving MSC/VLR 30/40 that the mobile station is located within its designated home zone, paging of the mobile station for an incoming call can be limited to the designated home zone area. Since each home zone area is typically much smaller than the associated location area, by paging the mobile station only within the home zone, valuable channel resources are better utilized.

Reference is now made to FIG. 6 illustrating a mobile station 100 performing a location update upon entering a designated home zone 200. Whenever the mobile station 100 enters a particular location area (LA) 60, the mobile station 100 performs a conventional location update with the serving MSC/VLR 30/40. The location update informs the VLR 40 of the mobile station's current location and, thereafter, all paging for incoming calls is performed within the specified location area.

In case the mobile station travels into the designated home zone 200, by retrieving the relevant

-10-

broadcast message transmitted over the cell broadcast channel, the mobile station 100 determines that the mobile station 100 is currently within the designated home zone. In accordance with the teachings of the present invention, although the mobile station 100 is still within the same location area 60, the mobile station 100 performs yet another location update with the serving MSC/VLR 30/40. The transmitted location update signal 200 further comprises a parameter identifying the mobile subscriber's home zone. Upon receiving the newly transmitted location update signal 220, the encapsulated home zone data are stored at a register (R) 230 associated with the MSC/VLR 30/40. As a result, data indicating that the associated mobile station is currently located within his or her designated home zone have been stored at the serving MSC/VLR 30/40. Similarly, in case the mobile station 100 exits the same home zone 200, yet another location update is performed with the serving MSC/VLR 30/40 to remove the previously stored data at the register (R) 230. As a result, the serving MSC/VLR 30/40 is now able to ascertain that the associated mobile station 100 is no longer within the designated home zone 200.

As an alternative, the mobile station may transmit an application layer message to inform the serving MSC/VLR 30/40 that the mobile station 100 has either entered or exited the designated home zone 200. Such application layer messages may include a conventional Short Message Service (SMS) or Unstructured Supplementary Service Data (USSD) message communicated over a Stand-alone Dedicated Control Channel (SDCCH). Similarly, the transmitted message includes data representing the designated home zone. An application module 225 associated with the serving MSC/VLR 30/40 then receives the transmitted application layer data, extracts the encapsulated home zone data, and stored at the register (R) 230.

Reference is now made to FIG. 7 which is a flowchart describing the steps performed by a serving mobile network

-11-

to route an incoming call towards a mobile station located within its designated home zone. In accordance with a conventional manner as described in FIG. 4, the serving MSC receives an incoming call setup message intended toward a particular called party mobile station at step 300. Such a call setup message includes an Integrated Service Digital Network User Part (ISUP) based Initial Address Message (IAM) transmitted over a connected Signaling System No. 7 (SS7) telecommunications network. By evaluating a Mobile Subscriber Integrated Service Digital Network (MSISDN) number included in the received call setup signal and identifying the called party mobile station, the serving MSC determines whether home zone data are stored at the register (R) associated with the identified called party mobile station at step 310. In case the called party mobile station is not located within the designated home zone and no home zone data have been stored at the register (R), the "no" decision link 360 is taken and paging messages informing the mobile station of an incoming call are broadcast throughout the whole location area in a conventional manner at step 350. In response to receiving an acknowledgment or response back from the paged mobile station, a traffic channel is seized and a call connection is accordingly established with the mobile station at step 340.

On the other hand, referring back to step 310, in case home zone data associated with the called party mobile station are stored at the register (R), the serving MSC is able to ascertain that the called party mobile station is currently located within its designated home zone. In accordance with the teachings of the present invention, instead of paging the mobile station inefficiently and wastefully throughout the whole location area currently covering the mobile station, the mobile station is to be paged only within the cell areas associated with the designated home zone. Accordingly, the cells associated with the specified home zone are

-12-

identified at step 320. By "mapping" the stored home zone data with appropriate cell identification information, associated cell areas can be identified. Such cell identification information includes Cell Global Identity (CGI), and Cell Identity (CI). The serving MSC or one of the base station controllers (BSCs) connected to the serving MSC can be associated with a table (refer to FIG. 6, the table 240) storing such correlation data and can perform the home zone data to cell area identification mapping function. After identifying the cell areas currently covering the specified home zone, paging messages alerting the mobile station of an incoming call are transmitted selectively throughout the identified cell areas at step 330. By transmitting paging messages throughout the selected few cell areas, valuable logical channel resources for communicating paging messages can be efficiently utilized and managed. After receiving a response from the paged mobile station within the designated home zone, a communication channel, such as a traffic channel (TCH), is seized and a call connection is established at step 340.

Although a preferred embodiment of the method and apparatus of the present invention has been illustrated in the accompanying Drawings and described in the foregoing Detailed Description, it will be understood that the invention is not limited to the embodiment disclosed, but is capable of numerous rearrangements, modifications and substitutions without departing from the spirit of the invention as set forth and defined by the following claims.

-13-

## WHAT IS CLAIMED IS:

1. A method for paging a mobile station within a mobile coverage area, said mobile coverage area including a smaller mobile coverage area therein designated as a home zone for said mobile station, said method comprising the steps of:

receiving an incoming call setup message at a telecommunications node serving said mobile coverage area;  
determining whether said mobile station is currently located within said home zone;

if yes,  
paging said mobile station of an incoming call within said smaller mobile coverage area associated with said home zone;  
otherwise,  
paging said mobile station within said mobile coverage area.

2. The method of claim 1 wherein said mobile coverage area comprises a first mobile coverage area comprising a mobile switching center (MSC) coverage area.

3. The method of claim 2 wherein said mobile coverage area further comprises a second mobile coverage area comprising a location area.

4. The method of claim 1 wherein said mobile coverage area further comprises a third mobile coverage area comprising a plurality of cell area, one or more of said plurality of cell areas comprising said smaller mobile coverage area of the home zone.

5. The method of claim 4 wherein said step of paging said mobile station within said home zone further comprises the steps of:

retrieving data identifying said home zone;

-14-

identifying said cell areas associated with said home zone by correlating said data with cell identification data associated with each of said plurality of cell areas.

5           6. The method of claim 1 wherein said step of determining whether said mobile station is currently located within said home zone further comprises the step of determining whether a location update has been performed by said mobile station within said home zone.

10           7. The method of claim 1 wherein said telecommunications node comprises a mobile switching center (MSC) serving said mobile station.

15           8. A method for communicating location data of a mobile station to a serving telecommunications node within a mobile telecommunications network, said method comprising the steps of:

20           recognizing at a particular mobile station that said mobile station is within a first geographic area being served by said telecommunications node;

          communicating, in response to said recognition, first data from said mobile station to said telecommunications node, said first data indicating that said mobile station is within said first geographic area;

25           recognizing at said mobile station that said mobile station is within a second geographic area, said second geographic area located within said first geographic area; and

30           communicating, in response to said recognition, second data from said mobile station to said telecommunications node, said second data indicating that said mobile station is within said second geographic area.

35           9. The method of claim 8 wherein said first geographic area comprises a location area.



-15-

10. The method of claim 9 wherein said second geographic area comprises one or more cell areas within said location area.

5 11. The method of claim 8 wherein said second geographic area comprises a home zone associated with said mobile station.

10 12. The method of claim 8 wherein said step of communicating said first data comprises the step of performing a location update with said telecommunications node.

15 13. The method of claim 8 wherein said step of communicating said second data comprises the step of performing a location update with said telecommunications node.

20 14. The method of claim 8 wherein said step of communicating said second data comprises the step of transmitting an application layer data toward said telecommunications node.

25 15. The method of claim 14 wherein said application layer data comprises a Short Message Service (SMS) message.

30 16. The method of claim 14 wherein said application layer data comprises an Unstructured Supplementary Service Data (USSD) message.

35 17. A telecommunications node for paging a mobile station within a mobile coverage area, said mobile coverage area including a smaller mobile coverage area

-16-

therein designated as a home zone for said mobile station, comprising:

means for receiving an incoming call setup message towards said mobile station;

5 means for determining whether said mobile station is currently located within said home zone;

if yes,

10 means for paging said mobile station within said smaller mobile coverage area associated with said home zone;

otherwise,

means for paging said mobile station within said mobile coverage area.

15 18. The telecommunications node of claim 17 wherein said mobile coverage area comprises a first mobile coverage area comprising a mobile switching center (MSC) coverage area.

20 19. The telecommunications node of claim 18 wherein said mobile coverage area further comprises a second mobile coverage area comprising a location area.

25 20. The telecommunications node of claim 17 wherein said mobile coverage area further comprises a third mobile coverage area comprising a plurality of cell areas, one or more of said plurality of cell areas comprising said smaller mobile coverage area of said home zone.

30 21. The telecommunications node of claim 20 wherein said means for paging said mobile station within said home zone further comprises:

means for retrieving data identifying said home zone;

and

35 means for identifying said cell areas associated with said home zone.

-17-

22. The telecommunications node of claim 17 wherein  
said means for determining whether said mobile station is  
currently located within said home zone further comprises  
5 means for determining whether a location update has been  
performed by said mobile station within said home zone.

1/7

FIG. 1


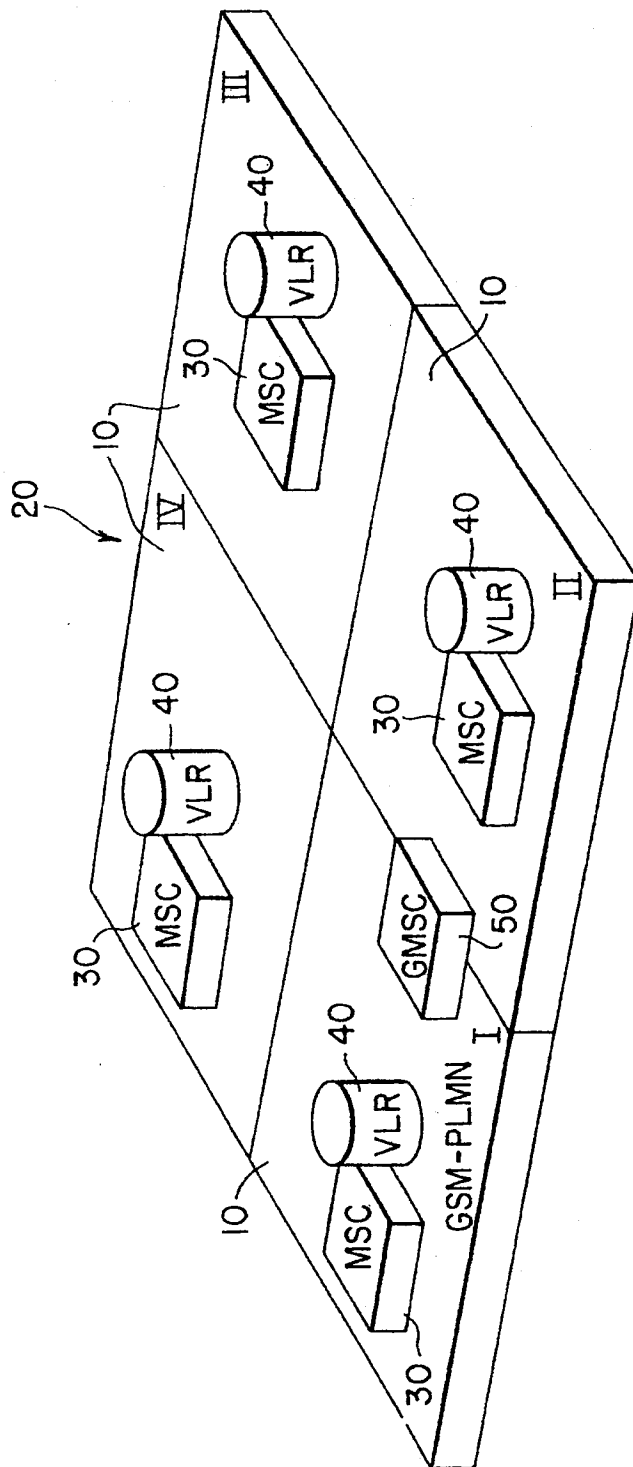


FIG. 2

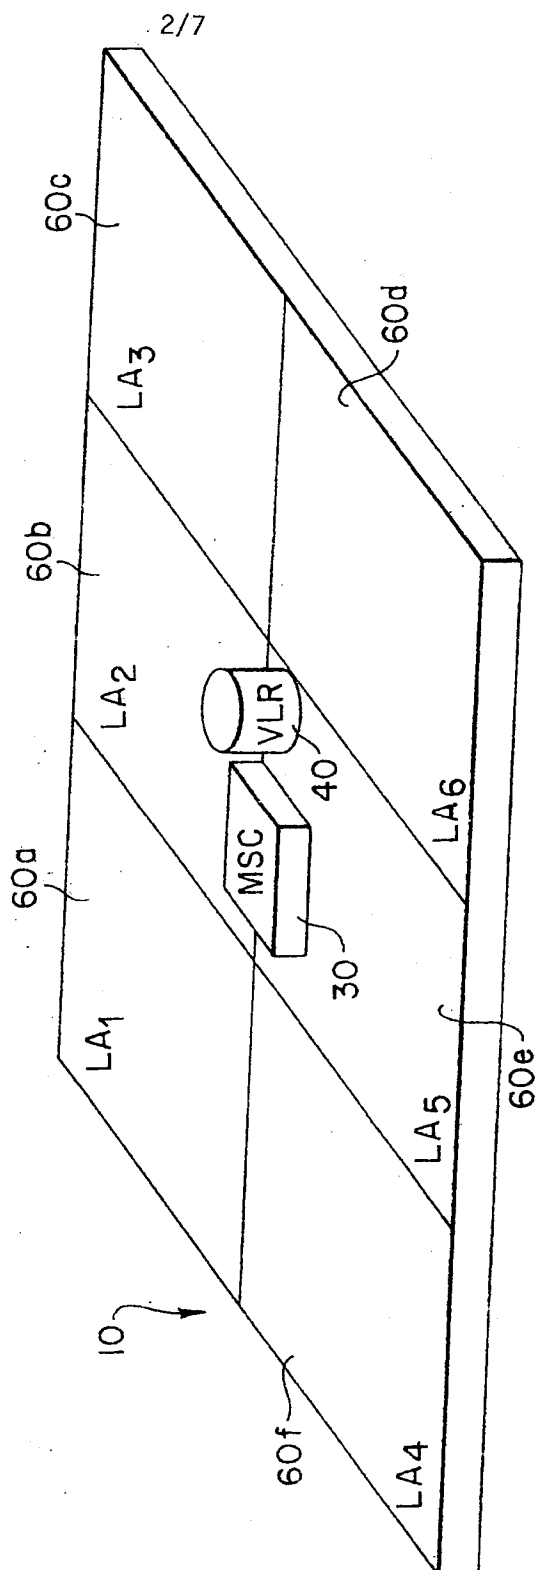

3/7

FIG. 3

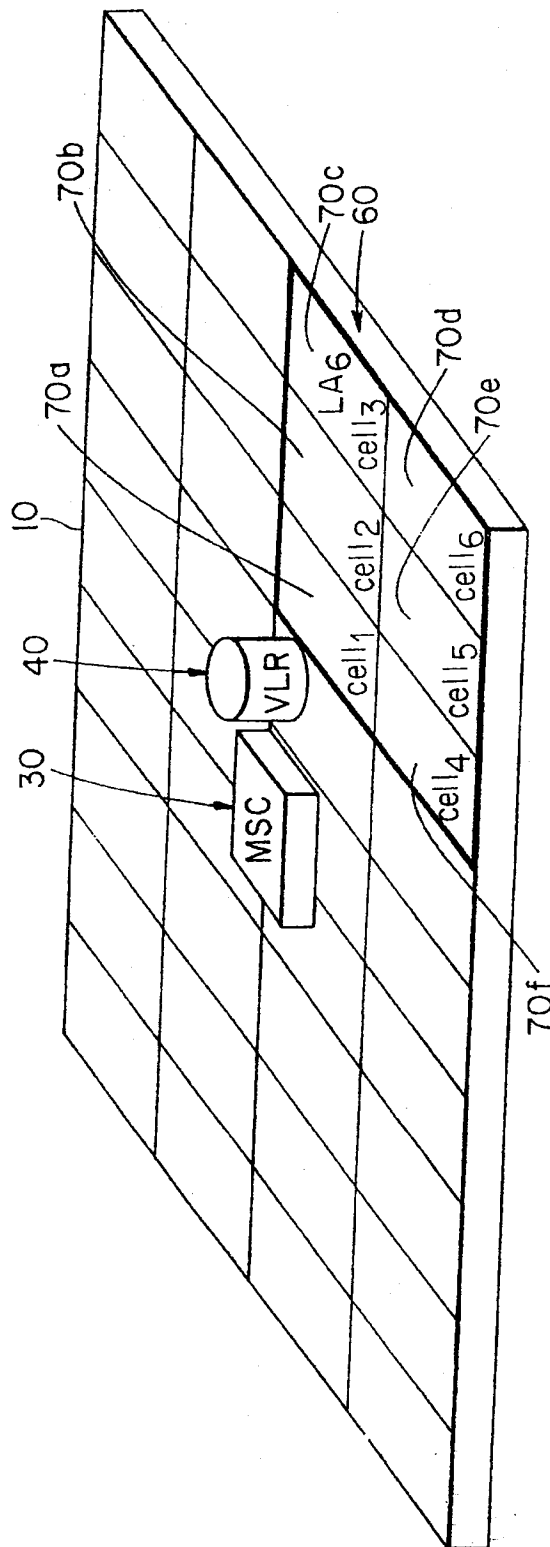


FIG. 4

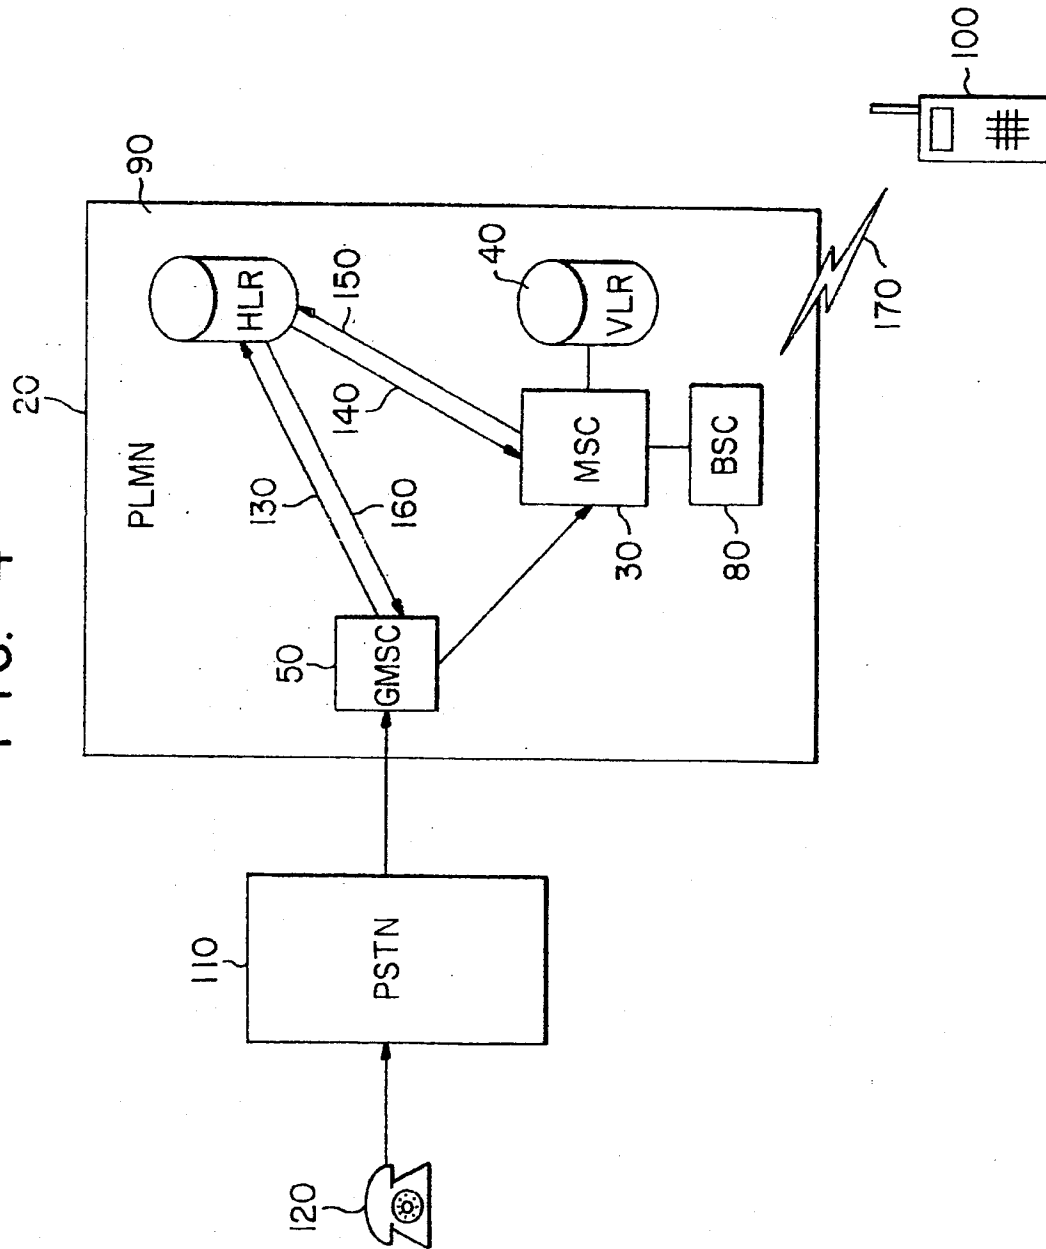
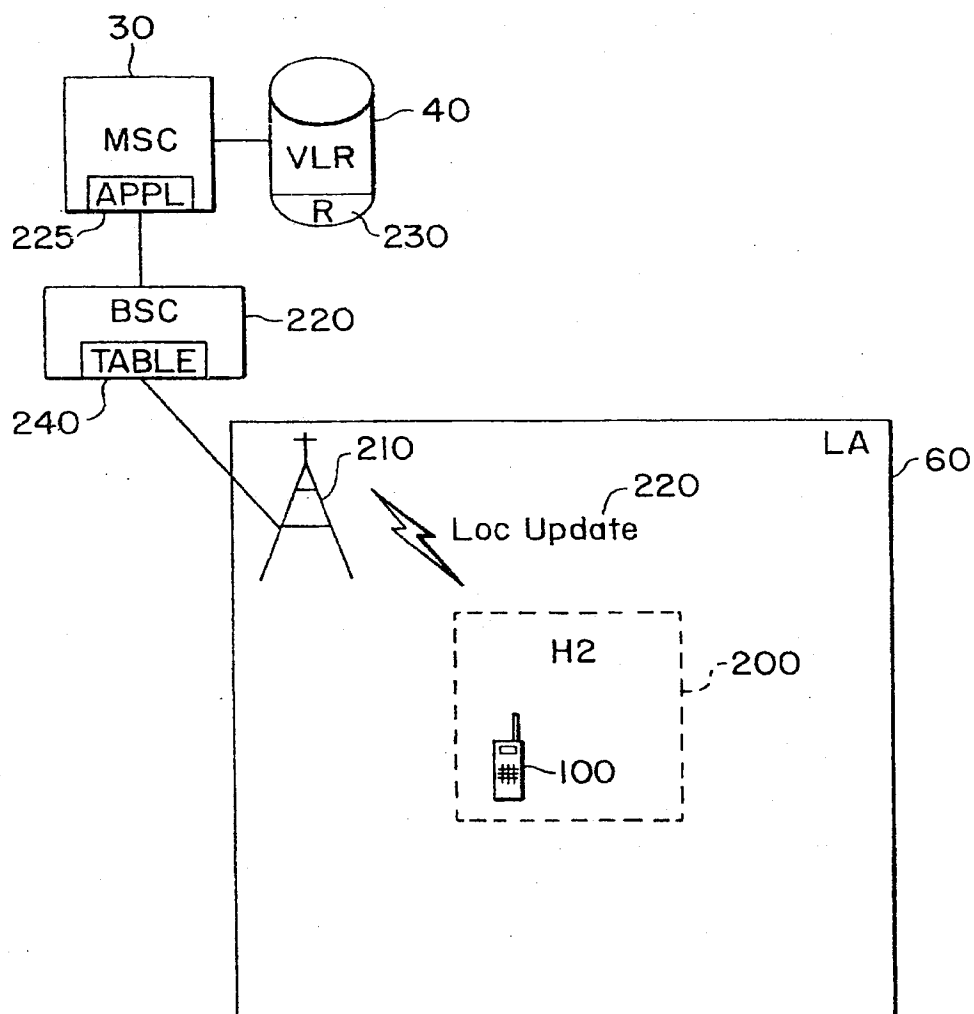




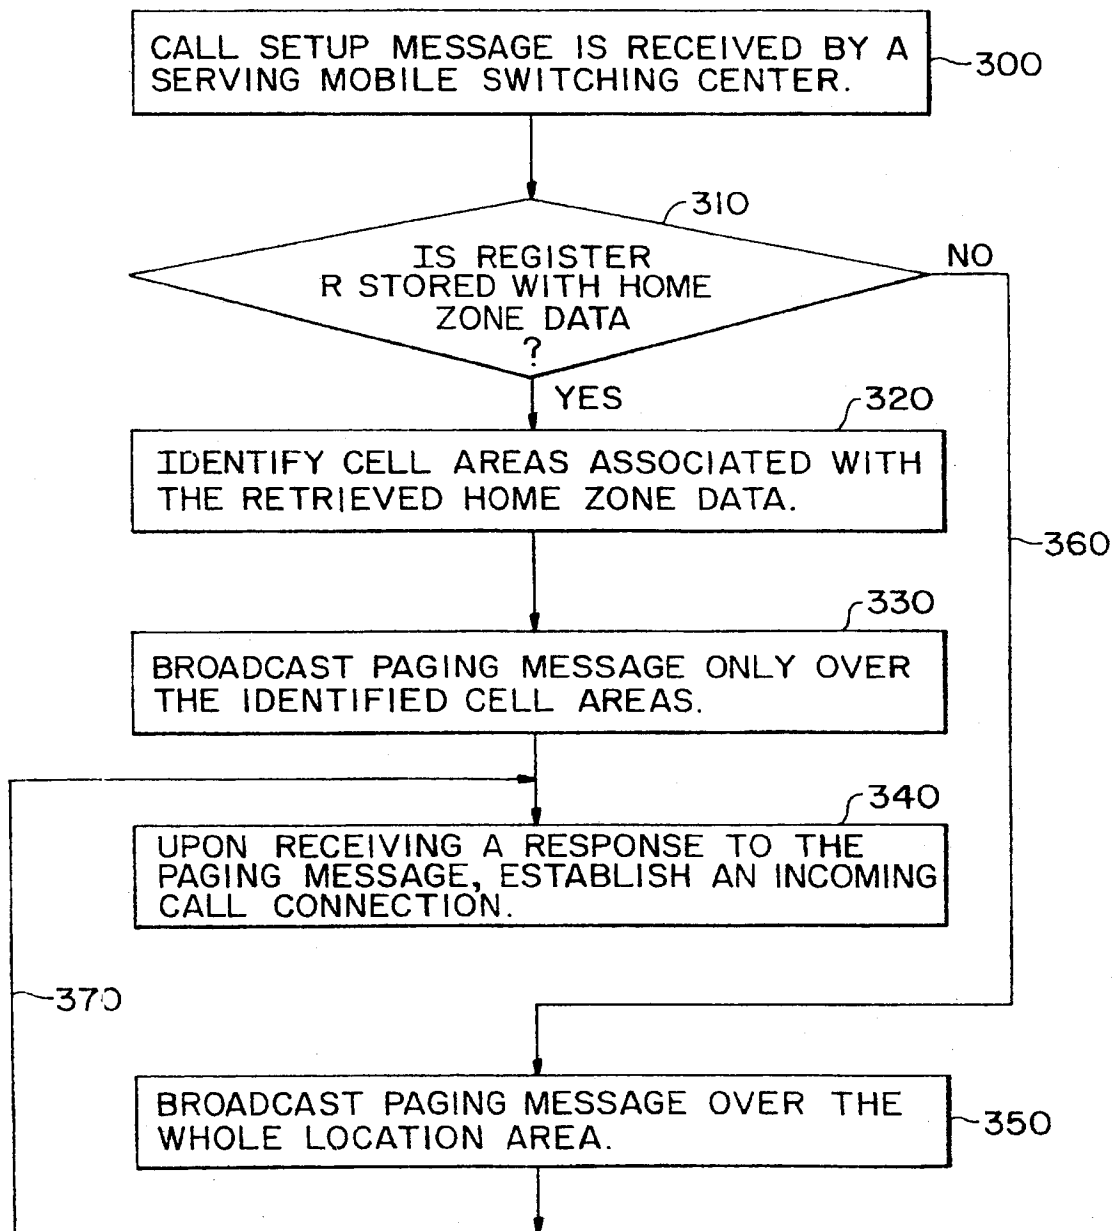


FIG. 6



7/7

FIG. 7






## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

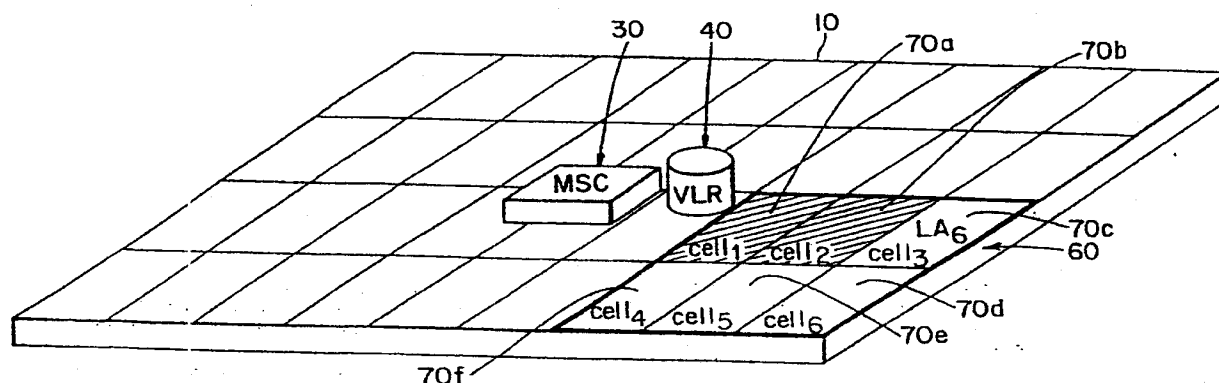(51) International Patent Classification <sup>6</sup> : <b>H04Q 7/38</b>		A3	(11) International Publication Number: <b>WO 98/25420</b>
			(43) International Publication Date: 11 June 1998 (11.06.98)
(21) International Application Number: PCT/US97/21737 (22) International Filing Date: 3 December 1997 (03.12.97) (30) Priority Data: 08/761,597          6 December 1996 (06.12.96)          US (71) Applicant: ERICSSON INC. [US/US]; 7001 Development Drive, P.O. Box 13969, Research Triangle Park, NC 27709 (US). (72) Inventors: ALPEROVICH, Vladimir; 18149 Rain Dance Trail, Dallas, TX 75252 (US). MAUPIN, Alain; 1133 Lookout Drive, Richardson, TX 75080 (US). (74) Agents: MOORE Stanley, R. et al.; Jenkins & Gilchrist, P.C., Suite 3200, 1445 Ross Avenue, Dallas, TX 75202 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>  (88) Date of publication of the international search report: 22 October 1998 (22.10.98)	

(54) Title: PAGING A MOBILE STATION WITHIN A PUBLIC LAND MOBILE NETWORK (PLMN)



## (57) Abstract

A first location update is performed whenever a mobile station enters a particular location area. Thereafter, in the event that the mobile station enters a designated home zone within the location area, a second location update is again performed to inform the serving mobile switching center (MSC) that the mobile station is currently located within the designated home zone. All paging messages for subsequent incoming calls are then broadcasted only within the cell areas associated with the designated home zone.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

# INTERNATIONAL SEARCH REPORT

1. National Application No

PCT/US 97/21737

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04Q7/38

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 5 357 561 A (GRUBE GARY W) 18 October 1994 see abstract see column 3, line 1 - column 4, line 65 see column 8, line 5 - line 21 see column 10, line 45 - line 56 see figures 1,5,6 see claim 1 ---	1-4, 17-20 8
X A	WO 94 07337 A (NOKIA TELECOMMUNICATIONS OY ;KAUPPI HANNA MARIA (FI)) 31 March 1994 see page 2, line 20 - page 4, line 12 see page 6, line 22 - page 7, line 14 see figures 1-4 --- -/-	1-4, 7-12, 17-20 5,6,13, 21,22

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

27 August 1998

Date of mailing of the international search report

07/09/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Gautier, L

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 97/21737

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>PASHTAN A; CIMET I A: "The CLU mobility management scheme for digital cellular systems."</p> <p>1996 IEEE 46TH VEHICULAR TECHNOLOGY CONFERENCE. PROCEEDINGS OF VEHICULAR TECHNOLOGY CONFERENCE (ATLANTA , USA, 28 APRIL-1 MAY 1996). ,</p> <p>vol. 3, 28 April 1996 - 1 May 1996, pages 1873-1877, XP002075768</p> <p>New-York, NY, USA</p> <p>see the whole document</p>	1-4,7,8,17
A	<p>EP 0 454 648 A (ERICSSON TELEFON AB L M ;ERICSSON GE MOBILE COMMUNICAT (US)) 30 October 1991</p> <p>see column 4, line 12 - column 4, line 57</p> <p>see figures 1,3</p>	1,17-22

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 97/21737

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5357561 A	18-10-1994	NONE	
WO 9407337 A	31-03-1994	FI 924199 A AU 670819 B AU 4963293 A EP 0660991 A JP 8501668 T	19-03-1994 01-08-1996 12-04-1994 05-07-1995 20-02-1996
EP 0454648 A	30-10-1991	US 5153902 A AU 643165 B AU 7858591 A CA 2078440 A,C CN 1056214 A,B CN 1110039 A CN 1110041 A DE 69128299 D DE 69128299 T ES 2112269 T WO 9117621 A	06-10-1992 04-11-1993 27-11-1991 28-10-1991 13-11-1991 11-10-1995 11-10-1995 15-01-1998 16-04-1998 01-04-1998 14-11-1991

Form PCT/ISA/210 (patent family annex) (July 1992)